



Measuring point check switch

Mounting into panels with thickness up to 50mm

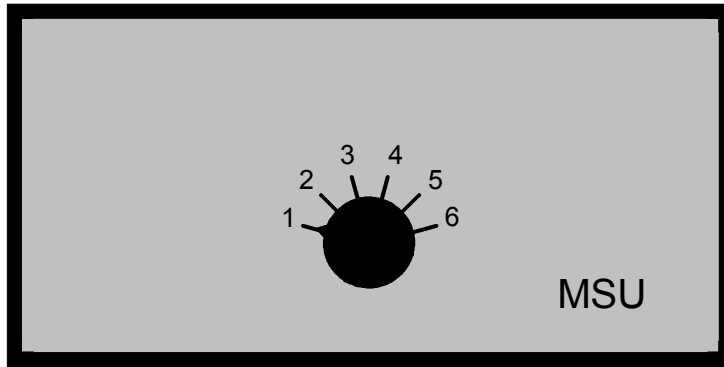

6 positions – 4 wire

ORDER NUMBER OF TYPE
MSU06.40.106B

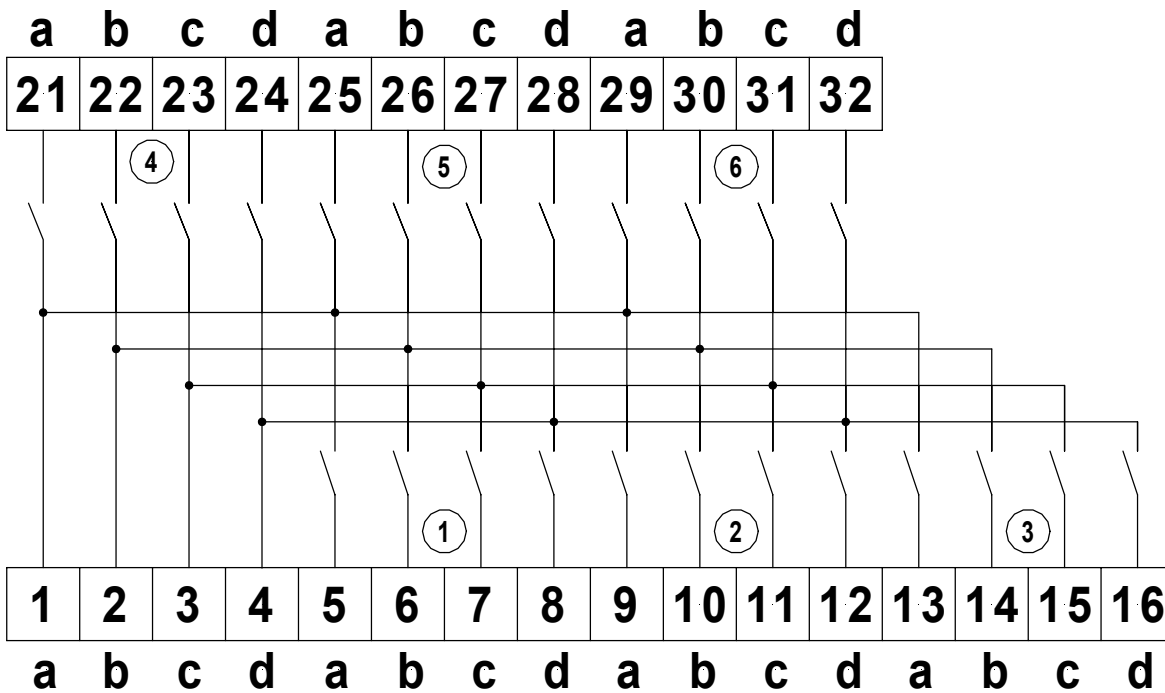

Technical data

Dimension	Housing	96 x 48 x 131
	Assembly cut out	92.0 ^{+0.8} x 45.0 ^{+0.6} mm
	Fastening	Special quick plastic clamp proper to fix in wall thickness up to 50mm
	Housing material	PC/ABS-Blend, colour black, UL94V-0
	Protective system	At the front IP40 Connection IP00
	Weight	Approx. 180gr.
	Connection	At the rear side via terminals up to 2.5mm ²
Mechanics	Lock in graduation	30° = 6 lock-in positions
	Shaking resistance	10-2000Hz/10g
	Mechanical life	> 25000 switching cycles
Elektrical data	Operative range	Voltage < 42V Current < 2A
	Switching performance (resistive load)	1V/1,5A (AC/DC) 24V/0,3A (AC/DC) 42V/0,2A (AC/DC)
	volume resistance	< 30mΩ when new
	Ambient conditions	Working temperature 0 up to + 60 °C Storing temperature -20 up to + 80 °C

Housing:

